



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP15 8QQ

REC'D 20 OCT 2003


WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

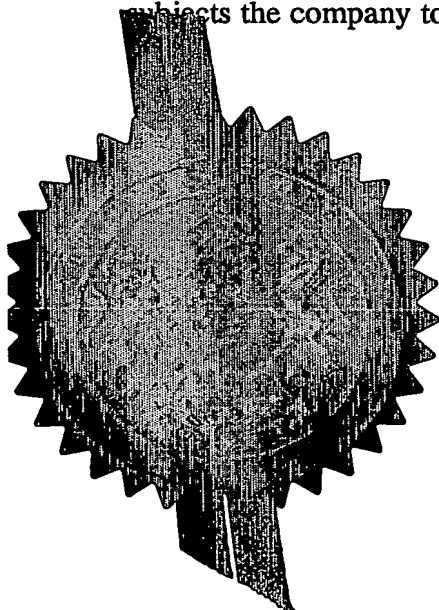


Signed

Dated 2 October 2003

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

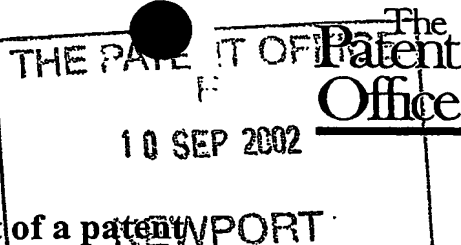

1/77

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference

IP/P7157

10SEP02 E746989-1 D02776  
P01/7700 0.00-0220914.6

2. Patent application number

(The Patent Office will fill in this part)

0220914.6

3. Full name, address and postcode of the or of each applicant (underline all surnames)

QINETIQ LIMITED

Registered Office 85 Buckingham Gate  
London SW1E 6PD  
United Kingdom

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

GB

8183857001

4. Title of the invention

LIDAR APPARATUS AND METHOD

5. Name of your agent (if you have one)

PHILIP DAVIES 'et al'

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

QINETIQ LIMITED  
IP Formalities  
A4 Bldg  
Cody Technology Park  
Ively Road  
Farnborough  
Hants GU14 0LX United Kingdom

Patents ADP number (if you know it)

8312415001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number or earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

YES (b)

Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document.

Continuation sheets of this form

Description 19 18

Claim(s) 3

Abstract 1

Drawing(s) 3 + 3 82

please see minute.

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

5

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I / We request the grant of a patent on the basis of this application.

Signature

PHILIP DAVIES

Date  
9.9.02

12. Name and daytime telephone number of person to contact in the United Kingdom

Linda Bruckshaw 01252 392722

#### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent of the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

#### Notes

- If you need help to fill in this form or have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have attached 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Lidar apparatus and method

This invention relates to differential absorption laser radar (DIAL), and in particular to an optical fibre based DIAL system for real time monitoring and measurement of gaseous species.

A variety of techniques for the measurement of gas concentrations are well known. For example, a number of static sensors are commercially available that allow accurate (parts per billion) localised sampling of a series of gas species. Many of these are "sniffer" devices which draw in a sample and analyse it using classical techniques, such as gas chromatography, flame ionisation or by Fourier Transform Infra-Red (FTIR) spectroscopy. These devices, by their nature, require significant (i.e. greater than 1s) sampling times and need to be located within the zone of interest.

Alternative techniques are also known which rely on non-dispersive infra-red (NDIR) or non-dispersive ultra-violet (NDUV) absorption. Typically, a series of absorption filters and a broadband source are used to provide light of a wavelength within the narrow absorption bands associated with a gas species of interest. Measurement of the absorption level at the particular wavelength of interest provides a measure of the gaseous concentration, but such systems are typically only capable of capture rates as fast as half a second, and are prone to interfering species.

Differential absorption lidar is another known technique for the remote detection of gas phase constituents. The basic concept of a DIAL system is that two wavelengths of laser light are transmitted by the lidar (light detection and ranging) apparatus. The first wavelength is set at a discrete absorption line of the gas species of interest, whilst the second wavelength is set close to, but away from, the absorption line. The differential absorption of the first and second wavelengths provides a quantitative measure of the average molecular concentration of the gas species. DIAL techniques

thus have an advantage over the alternative techniques described above in that they permit remote detection.

5 DIAL systems have been implemented in numerous ways; for example analogue, photon-counting and coherent detection systems are known. Coherent detection (or heterodyne) DIAL systems, in which the return radiation is coherently mixed with an optical local oscillator beam, typically provide a high signal to noise ratio with a good degree of immunity to interference from background light and cross-talk. Coherent detection DIAL systems are described in more detail elsewhere; for  
10 example see Rye, Appl. Opt. 17, 3862-3864 (1978).

A disadvantage of known coherent DIAL systems is that any fluctuations in the laser source or transmit/receive optics will lead to a large uncertainty in the detected optical powers unless the received signal is averaged over multiple correlation times.  
15 The numerical averaging required to overcome the effects of intensity fluctuations therefore limits the speed at which the differential absorption data can be extracted from the DIAL system.

Recently, a coherent DIAL system has also been demonstrated by Ridley *et al* (see  
20 Applied Optics, Vol. 40, No. 12, pp 2017-2023, 20 April 2001) that can reduce the time over which received signals need to be averaged by up to an order of magnitude. In the optical fibre based device, the two laser beams of slightly different wavelength share common transmit-receive optics. For small wavelength separations and a shallow target depth, highly correlated speckle fluctuations for the  
25 two wavelength channels can be obtained. However, intensity variations are still observed in the device that limit the rate at which differential absorption information can be obtained. Instrumentation drift over longer periods of time is also observed, which reduces the accuracy of comparative measurements taken over longer time scales.

It is an object of the present invention to mitigate at least some of the disadvantages associated with coherent DIAL devices that are described above.

5 According to a first aspect of the present invention a coherent differential absorption lidar (DIAL) device comprises; a transmit portion for directing a combined light beam, comprising at least two component light beams of discrete wavelengths, to a remote target and providing a local oscillator beam associated with each component light beam, a receive portion for receiving light returned from the remote target and for coherently mixing the received light with its associated local oscillator beam,  
10 and is characterised in that the device further comprises a signal correction means, the signal correction means comprising a means for extracting a portion of each component light beam from the transmit portion, a means for introducing a frequency difference between each extracted component light beam and its associated local oscillator beam and a means for directing the extracted beam into  
15 the receive portion.

A device of the present invention provides an additional correction (or normalisation) signal. The correction signal can be used in on-line or off-line processing to improve the accuracy (i.e. confidence) of a measurement taken at a  
20 particular point in time. In the case of a steady flow of gas, the improved accuracy can be used to provide a more rapid sampling rate; i.e. the time to acquire an averaged measurement of a given accuracy is reduced. In the case of measurements performed on a complex flow of gas, a more detailed statistical breakdown of gas composition over time is possible. The present invention thus allows real time (sub-  
25 millisecond) differential absorption data sampling rates without any significant drift over time due to variations in the output of the laser sources and/or from movement/vibration of the device. The present invention thus provides an improved DIAL device.

30 It would be recognised by the skilled person, that best performance is obtained by extracting light from the transmit portion at a position as near as possible to the

aperture through which the combined beam leaves the DIAL device. Similarly, the frequency shifted extracted beam should be input into the receive portion at a position as close to the receive aperture as possible. This ensures the normalisation signal corrects for any drift or vibrations in as much of the device as possible.

5

As described below, the remote target may comprise a reflective target that is placed a short distance (e.g. metres) or several kilometers from the device. A skilled person would also recognise that, with an appropriate design of optics, the system could be readily configured to make measurements at much shorter ranges. The reflective target may be a purpose made reflector or a reflector of opportunity. Alternatively, the remote target may be an aerosol. A person skilled in the art would recognise the various optical arrangements that would be required to provide a collimated beam for reflection from a solid remote target, and how a focussed beam could be obtained to allow measurements from defined target volumes.

15

It should be noted that the term "light" as used herein includes radiation in the ultraviolet, visible or (near/mid/far) infra-red. As described in more detail below, a person skilled in the art would recognise that a DIAL device of the present invention could be implemented across a wide range of wavelengths and the precise wavelength of operation would be selected on the basis of the gas species of interest. Similarly, a skilled person would recognise that the at least two component light beams of discrete wavelength could be provided by combining the output of two light sources (e.g. lasers) or by spectrally filtering the output of a light source that operates across a wider waveband.

25

Preferably, the DIAL device further comprising a means for introducing a frequency difference between each of the at least two component light beams and the associated local oscillator beam.

30

A DIAL device having a means for introducing a frequency difference between each of the at least two component light beams and the associated local oscillator beam

ensures that a detectable differential absorption signal can always be measured. A skilled person would recognise how the frequency differences induced between the local oscillator and a detected return beam (i.e. to provide return signal intensity data) should preferably be different to the frequency difference introduced between the extracted component light beam and the local oscillator to provide the correction signal. This enables simple separation of the return intensity and correction signals after heterodyne detection.

Advantageously, the combined light beam is routed through a fibre optic cable prior to transmission to the remote target.

Although the invention is preferably implemented using a fibre optic based device, it should be recognised that some or all of the internal optical components of the device may be optically linked by light beams transmitted through free space. For example, a lens used to transmit the combined beam may receive such light through free space from a fibre end that is located an appropriate distance from the lens.

Conveniently, the transmit portion focuses light on the remote target using a first optical arrangement and the receive portion collects light from the remote target using a second, alternative, optical arrangement.

In other words, the optical components (lenses etc) used to transmit the beam to the remote target are separate to the optical components that are used to collect the returned beam; the arrangement is bistatic. It should be noted that it is also possible to implement the present invention using common transmit and receive optical components; i.e. a monostatic transceiver configuration.

Preferably, each of the at least two component light beams is generated by a discrete laser source. In this case, it would be appreciated by a person skilled in the art that two separate local oscillator beams (i.e. a local oscillator beam from each laser source) would be necessary to enable coherent detection.



- Alternatively, the transmit portion comprises one laser source, a means for dividing the light beam output by the laser source into at least two component light beams and a means for introducing a frequency difference between said component light beams. In this case, a single local oscillator beam extracted from the laser source can be used to provide coherent (heterodyne) detection. The frequency difference introduced between the component light beams providing the required difference in the discrete wavelengths to provide differential absorption measurements.
- 10 Preferably, one or more of the means for introducing a frequency difference comprises an acousto-optic modulator.

- Conveniently, the DIAL device further comprising at least one polarisation controller configured so as to control the polarisation state of the received light and/or the extracted component light beam with respect to the polarisation state of the associated local oscillator beam.
- 15

- The addition of a polarisation controller allows the heterodyne mixing efficiency at the heterodyne detection means to be controlled (e.g. maximised) by matching the polarisation of the signal and local oscillator beams. Alternatively, polarisation maintaining optical fibres may be used to couple the optical components.
- 20

- Advantageously, the transmit portion further comprises at least one optical amplifier to amplify the intensity of one or more of the at least two component light beams. The additional of an amplifier enables output signal strength to be increased if the remote target has a low reflectivity (e.g. because it is a distributed target such as an aerosol).
- 25

- Preferably, the signal correction means additionally comprises at least one delay line. As described in more detail below, the width of the detected heterodyne peak may be broadened if the path length (i.e. device to target to device) is significantly
- 30

greater than the coherence length of the laser. The addition of a delay line (e.g. to delay the local oscillator beam(s) and/or to delay the extracted beam) will reduce this unwanted peak broadening.

- 5 Advantageously, the wavelength of one of the at least two component light beams is selected to coincide with a peak in absorption of a gas species of interest.

According to a second aspect of the invention, a method of providing a normalisation signal in a coherent DIAL device comprising the steps of; extracting  
10 radiation from the transmit path of the device, introducing a frequency difference between the extracted radiation and associated local oscillator beam, and inputting said frequency shifted radiation into the receive path of the device.

The invention will now be described, by way of example only, with reference to the  
15 following drawings in which;

figure 1 shows a heterodyne DIAL device according to the present invention,

figure 2 illustrates an alternative DIAL device according to the present invention,  
20

figure 3 illustrates a second alternative DIAL device according to the present invention,

figure 4 shows theoretical absorption spectra for water vapour,  
25

figure 5 shows intensity fluctuation data (speckle) measured using a device of the type described with reference to figure 1,

figure 6 shows the correlation coefficient of detected signals versus wavelength  
30 difference for a device of the type described with reference to figure 1, and

figure 7 shows the channel drift for a device of the type described with reference to figure 1.

Referring to figure 1, coherent DIAL apparatus 2 according to the present invention is shown. The apparatus comprises a transmitter 4, and a receiver 5.

The transmitter 4 comprises a first laser 6 and a second laser 8. The first and second lasers are distributed feedback (DFB) semiconductor lasers that operate within a user selectable wavelength range of 1500nm to 1600nm and have a linewidth of 20KHz.

10 The optical output of the first laser 6 is fed into a first beam-splitter 10 via optical fibre 12, whilst the optical output of the second laser 8 is fed into a second beam-splitter 14 via optical fibre 16. The first and second beam-splitters 10 and 14 divide each beam they receive into a local oscillator beam and a main beam. The local oscillator beams (LO1 and LO2) are passed, via optical fibres 18 and 20, to the

15 receiver 5 whilst the two main beams are fed, via optical fibres 22 and 24, to the beam-combiner 26.

The beam-combiner 26 combines the two optical beams it receives, and outputs a main combined beam to an optical isolator 32 via optical fibre 28. The beam-combiner 26 also directs a reference combined beam (which is typically of an equal or lower intensity than the main combined beam) to a laser wavelength monitor 30 to permit the wavelengths of the transmitted beam to be measured. The first acousto-optic modulator (AOM) 34 imparts a frequency shift of around 80MHz to the main combined beam to enable subsequent heterodyne detection as described

20 below. The main combined beam is then directed to a remote target (not shown) via optical fibre 36 and transmit optics 38.

The receiver 5 comprises receive optics 40 that collect any radiation returned from the remote target, and direct it along the optical fibre cable 42. The two components of the return beam are then separated by the wavelength separation means 44, and

30 each separated beam component is directed (via optical fibre cables 46 and 48) to

beam-combiners 50 and 52 respectively. The local oscillator beams (LO1 and LO2) provided by the first and second beam-splitters 10 and 14 are also fed to the respective beam-combiners 50 and 52, and the resulting mixed beams are directed to detectors 54 and 56. The polarisation of each local oscillator beam (LO1 and LO2) is adjustable using fibre polarisation controllers 58 and 60 to ensure maximum heterodyne mixing efficiency is obtained at the respective detectors.

A small proportion of the main combined beam is also extracted from the optical fibre 36 of the transmitter 4 and fed to a second acousto-optic modulator 62. The second acousto-optic modulator is arranged to introduce a frequency shift of 80MHz to the extracted beam, and to subsequently direct the frequency shifted beam into the optical fibre 42 of the receiver.

Heterodyne mixing of a frequency shifted beam and its associated local oscillator beam will produce a signal at a frequency that corresponds to the difference in frequency of the two beams. The beam returned from the target will, when mixed with its associated LO beam, produce a heterodyne signal at a frequency corresponding to the frequency shift imparted to it by the first AOM 34. These signals, once detected and converted in an electrical signal by the relevant detectors 54 and 56, are integrated over a narrow bandwidth at the shift frequency using a spectrum analyser. It should be noted a spectrum analyser is used simply as a convenient and flexible way of implementing a test system. In a DIAL product these could be replaced with appropriate dedicated electronic circuitry.

It should be noted that the two laser sources produce beams that are of a similar wavelength and pass these beams along substantially the same transmit and receive optical paths. Therefore, as described previously by Ridley *et al* (ibid), any noise due to atmospheric disturbances and/or Pointing instability will be substantially the same for the two different beams and have no significant effect on the measured differential absorption ratio.

In apparatus of the present invention, the detectors 54 and 56 will also provide signals at a frequency that correspond to the frequency difference between the relevant local oscillator and the beam that is routed through the second AOM 62 and fed in to the optical fibre 42 of the receiver 5. Therefore, the detectors 54 and 56 will also each output an additional heterodyne signal (i.e. a signal centred at a frequency equal to the frequency shift applied by the first AOM 34 plus the frequency shift applied by the second AOM 62). These additional signals permit monitoring of any variations in intensity that are induced by laser fluctuations (e.g polarisation wander or wavelength drift), instrument drift and/or variations arising from movement or thermal expansion of optical fibres. In other words, real time normalisation signals are produced.

A person skilled in the art would recognise the various alternative optical configurations that could be employed in place of that described with reference to figure 1 to implement this invention. One such alternative configuration is described with reference to figure 2. Components described with reference to figure 2 that are similar to those described in figure 1 have been assigned like reference numerals

From figure 2, it can be seen how a pair of acousto-optic modulators 70 and 72 (with associated optical isolators 74 and 76) could be used to provide different frequency shifts to the outputs of the first and second lasers 6 and 8. After beam combination in the beam combiner 26, the main combined beam is directed to a remote target by the transmit optics 38 in the same manner described with reference to figure 1.

The separate AOMs 70 and 72 impart different frequency shifts (e.g.  $\nu_1$  and  $\nu_2$ ) to each laser beam. A small proportion of the main combined beam is also extracted from the optical fibre 36 and fed into optical fibre 42 via the second acousto-optic modulator 62 which imparts an additional frequency shift of  $\nu_c$ . The beams are combined using beam combiners 78 and 80 and then mixed with the local oscillator beams at the detector 54 producing four signals; two signals from the returned

beams at a frequency of  $\nu_1$  and  $\nu_2$  and two normalisation signals at  $\nu_1 + \nu_c$  and  $\nu_2 + \nu_c$ .

5 Although the apparatus described with reference to figure 2 only requires a single detector, any associated cost advantage is reduced by the requirement to use three AOMs rather than the two AOMs employed in the device described with reference to figure 1.

10 Referring to figure 3, a further alternative DIAL device of the present invention is shown. Components shown in figure 3 that are similar to those of figures 1 or 2 have been assigned like reference numerals.

15 A single laser source 6 outputs a monochromatic laser beam that is split, by the beam splitter 10, into a local oscillator beam (LO) and a main beam. The main beam is passed through an optical isolator 90 and divided further into two equal intensity beams by the beam-splitter 92. One of these split beams is passed through a first AOM 94 and a first Erbium doped fibre amplifier (EDFA) 96, and the other split beam is passed through a second AOM 98 and a second EDFA 100. The two beams are then recombined in the recombiner 26; a small portion of the recombined beam is fed to a laser wavelength monitor 30 and the remaining beam is fed in to the optical fibre 36.

20 The majority of the beam contained in fibre 36 is transmitted to a remote target (not shown) via the transmit optics 38, and a proportion of the light is fed via the third AOM 62 into the optical fibre 42 of the receiver.

30 The first AOM 94 shifts the laser frequency  $\nu$  to a higher frequency ( $\nu + \nu_+$ ), whilst the second AOM 98 shifts the frequency downwards ( $\nu + \nu_-$ ). If the frequency shift is comparable to the width of an absorption, these opposing shifts provide the required wavelength separation. The laser can thus be tuned to have one wavelength sitting at an absorption maxima, whilst the other sits at a minima.

The third AOM 62 can be chosen to induce either an up-shift or a down shift in frequency ( $\nu_c$ ). As described above, filtering the peaks around  $|\nu_+|$ ,  $|\nu_-|$ ,  $|\nu_+ + \nu_c|$ , and  $|\nu_- + \nu_c|$  will provide the differential absorption and the drift normalisation information for the two channels. For example, if  $\nu_+ = +250\text{MHz}$ ,  $\nu_- = -251\text{MHz}$  and  $\nu_c = -80\text{MHz}$ , then the ratio of peaks at 250MHz and 251MHz would provide the differential absorption, and peaks at 170MHz and 331MHz would provide a normalisation signal for the two arms of the apparatus.

It is also possible to provide delay lines 104 and 106 so that the delay in local oscillator and normalisation beams are matched with the delay of the optical round trip (to target and back). This ensures the bandwidth of the return signal is narrow thereby providing a coherent peak. A person skilled in the art would recognise that delay lines could also be incorporated in apparatus described with reference to figures 1 and 2 above.

It should be noted that the configuration of the transmit optics 38 and the receive optics 40 allows differential absorption to be measured over the total path length, or within a particular range of interest. For example, measurements can be taken over the total beam path length by reflecting a collimated beam from a remote target. The remote target may be a specially placed retro-reflector for applications where a path is clearly defined (e.g. on a roadside, tracts above land etc), or it may be a reflective target of opportunity (such as a car, plane or building etc). Alternatively, defined volume measurements of the backscatter produced from distributed targets (e.g. aerosols) within a particular probe volume could be obtained by focussing the transmit and receive optics to measure a particular point in space or by implementation of a pulsed-laser/gated-return scheme.

If a low intensity return signals are likely to be received from the target (e.g. the target object, or distributed target, has a low reflectivity), the optical output power of the device of this invention can simply be increased through the use of higher power

laser sources or by suitable amplification (e.g. Erbium Doped Fibre Amplifiers EDFAs of the type described with reference to figure 3).

5 Although bistatic transceivers (i.e. transceivers having separate transmit and receive optics) are illustrated in figures 1, 2 and 3, a person skilled in the art would recognise that monostatic transceivers (i.e. transceivers having combined transmit and receive optics) could be used. Similarly, it would also be recognised by a skilled person that although optical fibre based systems are preferred for many reasons (e.g. ease of component alignment, cost etc) the present invention could also be  
10 implemented using free space optical components.

The devices described with reference to figures 1 to 3 employ lasers that output radiation in the 1500nm to 1600nm range, but it should be noted that the invention could be implemented using radiation of any wavelength. A skilled person would  
15 recognise that the wavelength of the laser source would simply be selected to match an absorption maxima of the gas species of interest. It should therefore be understood that as laser diode technology develops, it will become possible to access wavelengths further in to the infrared. This use of increased wavelength may be a considerable advantage for differential absorption measurements of species such as  
20 Carbon monoxide, Nitrous oxides and unburned hydrocarbons.

#### Example.

An experiment was performed to demonstrate how apparatus of the present invention can provide real time DIAL measurements of gas species in the  
25 atmosphere.

The various optical components of a DIAL device of the type described with reference to figure 1 were connected together whilst monitoring optical power at each stage to insure they were performing to specification. The system was first  
30 optimised by looking at the signal reflected off a rotating card, and it was then aligned over a total distance of 80m to insure parallel, collimated transmit and paths.



Alignment was achieved by transmitting the "raw emission" of an Erbium Doped Fibre Amplifier (EDFA) out of both the transmit and receive apertures. The two beams were then steered back in the general direction of the transceiver off a mirror placed approximately 40m away. Transverse and axial fibre end positions were adjusted to control direction and focus respectively, whilst viewing the return beams on a large sheet of temperature sensitive film. Adjustments were also made to insure the same beam diameter and separation (equivalent to the separation between the two apertures) was maintained at all points along the path. Finally, the fibres were then moved towards the transmit and receive lenses (38 and 40) by 0.5mm to provide slightly diverging, overlapping paths.

A bore-sight was fixed to the transceiver mount at a particular transverse separation from the apertures. This was sighted, maintaining this separation from the beam positions viewed over 40m. A return signal was obtained off a near-range retro-reflector for fine tuning, and then off a longer range retro-reflector.

Electrical signals from the photodetectors (50 and 52) were monitored using two Hewlett-Packard spectrum analysers. The detected signal took the form of a peak at the first AOM shift frequency (80MHz). This peak was broadened due to the fact that the return light, rather than maintaining a "coherent spike", was scrambled beyond the coherence length of the laser.

It should be noted that if the range of the target is known, this delayed-self heterodyne peak can be narrowed to a coherent peak by matching the LO, in-fibre, to the round trip (free space) delay. It is also possible to estimate the roundtrip distance using the spacing of ripples in the broadened peak. This method was used to quote a round trip of  $3.95 \pm 0.15\text{km}$ .

The operational mode of the spectrum analysers was set to bandpass filter and integrate the signal within the peak. A resolution bandwidth (300kHz) was selected

as the best trade-off; i.e. capturing the signal, without passing an excessive amount of noise. Video bandwidth (1kHz) was selected to smooth away electrical RF noise, without compromising the instruments' response to any scintillation that occurs over millisecond time-scales.

5

As described above, differential absorption involves the measurement of the ratio of absorption between two different wavelengths; one usually placed near the minimum absorption, one placed near the maximum. Beer's law is used to determine difference in absorption coefficients ( $\alpha$ ) per unit concentration for given return beam intensity (T). The concentration of a particular species over the distance of the beam (L), can therefore be determined using:

10

$$(\alpha_1 - \alpha_2)L = \ln\left(\frac{T_1}{T_2}\right) \quad (1)$$

15 Referring to figure 4, the absorption spectra over the wavelength range of 1.500 $\mu$ m to 1.510 $\mu$ m is shown for water vapour. The theoretical spectra were generated using the commercially available HITRAN (TM) database produced by the US air force and the Ontar Corporation fascode atmospheric IR transmission model. It can be seen from figure 4 that a collection of overlapping peaks exist for water vapour over  
20 1.5 $\mu$ m to 1.55 $\mu$ m with very strong (at times complete) light extinction.

Referring to figure 5, data was acquired using the system described above over 2 second periods, with 1000 data points in each set.

25 Figure 5(a) shows the fluctuating intensity on the two channels for a typical subsection of data over 0.2 seconds with a difference in wavelength of 0.35nm. Figure 5(b) shows data for a wavelength difference of 70nm. Inspection of the graphs of figure 5 show how the signals are well correlated in the 0.35nm case, whilst in the case of a 70nm separation there are clearly times when poor correlation is observed.

30

The measure voltage signal was then squared to convert into a quantity proportional to light intensity ( $I$ ), and correlation coefficients  $C$  were calculated using:

$$C_{(I_1, I_2)} = \frac{\langle (I_1 - \langle I_1 \rangle) \cdot (I_2 - \langle I_2 \rangle) \rangle}{\sqrt{\langle (I_1 - \langle I_1 \rangle)^2 \rangle} \cdot \sqrt{\langle (I_2 - \langle I_2 \rangle)^2 \rangle}} \quad (2)$$

5

It is noted that the correlation coefficient is independent of the magnitude of data points. A value of unity would show a perfect correlation between the signals on the two channels. Values approaching zero indicate truly independent variables, and negative values indicate an anti-correlation (i.e. the maximum of one signal corresponds to the minima of the other signal).

10

The calculated correlation coefficients for the data of figure 5 were 0.997 for the wavelength difference of 0.35nm and 0.752 for the wavelength difference of 70nm.

15

As described previously in Ridley et al, the reduced correlation as the wavelength difference is increased arises from the monochromatic nature of laser radiation. At similar wavelengths, the interference (or speckle) pattern produced as light is directed off scattering centres (e.g. airborne aerosols) is quite similar. However, as the wavelength separation is increased the speckle pattern difference also increases, which results in a reduced correlation.

20

Referring to figure 6, correlation coefficients are plotted against the difference in wavelength for the variety of measurements taken over different days and weather conditions (good/variable visibility, calm/blustery, overcast/sunny days). It can clearly be seen that there is a trend towards de-correlation as the difference in wavelength is increased, irrespective of the weather conditions.

25

It can thus be seen that speckle induced variations in the received beams can be reduced by using a narrow wavelength separation. However, differential absorption

measurements are still degraded by drifts in individual channel sensitivities such as those brought about by laser fluctuations, polarisation wander or movement of the optical fibres. Added to this, there are typically changes in laser power with tuning and a slow drift over time through strains induced in the fibre due to changes in temperature. More severe, rapid drift would also be expected with vibration of the platform and/or rapid temperature variations.

As described above, the measurement of a pair of additional normalisation signals in accordance with this invention permits correction of any variation or drift within the DIAL device itself.

To demonstrate the normalisation capabilities of a device according to the invention, the two laser frequencies were moved as close together as the resolution of the wavelength spectrum analyser would allow. The transmit and receive optics were also patched together (near where they would normally be open ends at the transceiver head) using long lengths (circa twenty metres) of fibre.

The second AOM 62 down-shifted the frequency by 82MHz, whereas the first AOM 34 provided an up-shift in frequency of 80MHz. Normalisation peaks were thus provided in the detected spectra at a frequency of 2MHz (i.e. 82MHz minus 80MHz). The electrical bandpass filter was set on the spectrum analysers to enable simultaneous collection of any two of the four peaks (i.e. channel 1 or channel 2 at 2MHz or 80 MHz).

Figure 7 shows the detected intensity for various signals as portions of the DIAL device are mechanically perturbed. Correlation analysis similar to that detailed with reference to figure 6 was also performed and results are shown in figures 7.

Referring to figure 7a, it can be seen that good correlation ( $C=0.964$ ) is observed between drifts in channel 1 @ 2MHz and channel 1 @ 80MHz when the fibres were mechanically perturbed on a section that was common to both channels.

Figure 7b shows an example of a correlation ( $C = 0.29$ ) of the same peaks as figure 7a when the fibres/laser were perturbed more rapidly and with greater force. The low value of  $C$  in this case was found to be due to lack of filtering of low intensity fluctuations; all vibration-induced fluctuations are well correlated. It was also found that channel 1 showed good immunity to vibrations induced in arms unique to channel 2.

Figure 7c shows good correlation between the signal from channel 1 at 2MHz and channel 2 at 2MHz when mechanical perturbations were induced in common parts of the device. The use of two separate LOs did however introduce two further degrees of freedom and occasionally a lack of correlation, even an anti-correlation, was observed. However, an improved level of correlation would be expected if a device of the type described with reference to figure 2 was used.

It has thus been demonstrated that instrument drift (laser power, polarisation and even vibration/movement of fibres) are well correlated and can therefore be readily corrected in post/parallel processing. Changes induced on common-channels were also shown to be in step with one another on the two detector outputs. Furthermore, each channel showed immunity to changes induced in an arm unique to the other channel.

This additional normalisation data thus provides apparatus in which sub-millisecond differential absorption measurements can be reliably made over long periods of time in harsh environments. This is a particular advantage for remotely monitoring varying gas concentrations (e.g. dispersal of plumes).

Claims

- 1      A coherent differential absorption lidar (DIAL) device comprising;  
  
a transmit portion for directing a combined light beam, comprising at least two component light beams of discrete wavelengths, to a remote target and providing a local oscillator beam associated with each component light beam,  
  
a receive portion for receiving light returned from the remote target and for coherently mixing the received light with its associated local oscillator beam,  
  
characterised in that the device further comprises a signal correction means, the signal correction means comprising a means for extracting a portion of each component light beam from the transmit portion, a means for introducing a frequency difference between each extracted component light beam and its associated local oscillator beam and a means for directing the extracted beam into the receive portion.
2.      A DIAL device according to claim 1, and further comprising a means for introducing a frequency difference between each of the at least two component light beams and the associated local oscillator beam.
3.      A DIAL device according to any preceding claim wherein the combined light beam is routed through a fibre optic cable prior to transmission to the remote target.
4.      A DIAL device according to any preceding claim wherein the transmit portion focuses light on the remote target using a first optical arrangement and the receive portion collects light from the remote target using a second, alternative, optical arrangement.
5.      A DIAL device according to any preceding claim wherein each of the at least two component light beams is generated by a discrete laser source.

6 A DIAL device according to any one of claims 1-4 wherein the transmit portion comprises one laser source, a means for dividing the light beam output by the laser source into at least two component light beams and a means for introducing a frequency difference between said component light beams.

7. A DIAL device according to any preceding claim wherein one or more of the means for introducing a frequency difference comprises an acousto-optic modulator.

8 A DIAL device according to any preceding claim and further comprising at least one polarisation controller configured so as to control the polarisation state of the received light and/or the extracted component light beam with respect to the polarisation state of the associated local oscillator beam.

9 A DIAL device according to any preceding claim wherein the transmit portion further comprises at least one optical amplifier to amplify the intensity of one or more of the at least two component light beams.

10 A DIAL device according to any preceding claim wherein the signal correction means additionally comprises at least one delay line.

11 A DIAL device according to any preceding claim in wherein the wavelength of one of the at least two component light beams is selected to coincide with a peak in absorption of a gas species of interest.

12. A method of providing a normalisation signal in a coherent DIAL device comprising the steps of;

extracting radiation from the transmit path of the device,

introducing a frequency difference between the extracted radiation and associated local oscillator beam, and

inputting said frequency shifted radiation into the receive path of the device.

13. A DIAL device as hereinbefore described with reference to figures 1 to 3.






## Abstract

### LIDAR APPARATUS AND METHOD

A coherent differential absorption lidar (DIAL) device 2 comprises a transmit portion 4 for directing a combined light beam to a remote target and a receive portion 5 for receiving light returned from the remote target and for coherently mixing the received light with its associated local oscillator beam. The combined beam comprises at least two component light beams of discrete wavelengths. The device further comprises a signal correction means. The signal correction means comprising a means for extracting a portion of each component light beam from the transmit portion, a means for introducing a frequency difference 62 between each extracted component light beam and its associated local oscillator beam and a means for directing the extracted beam into the receive portion. This provides an additional correction signal thereby improving device performance.

Figure 1 refers.

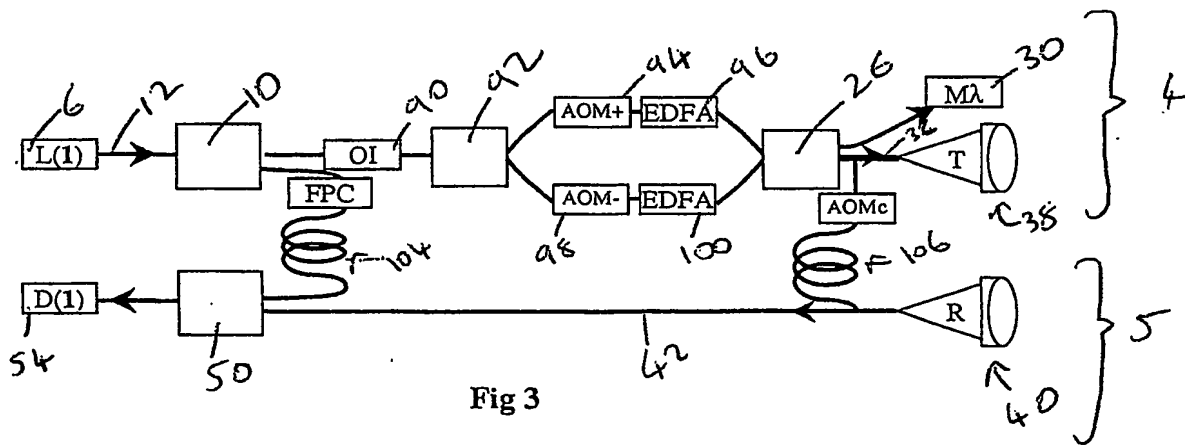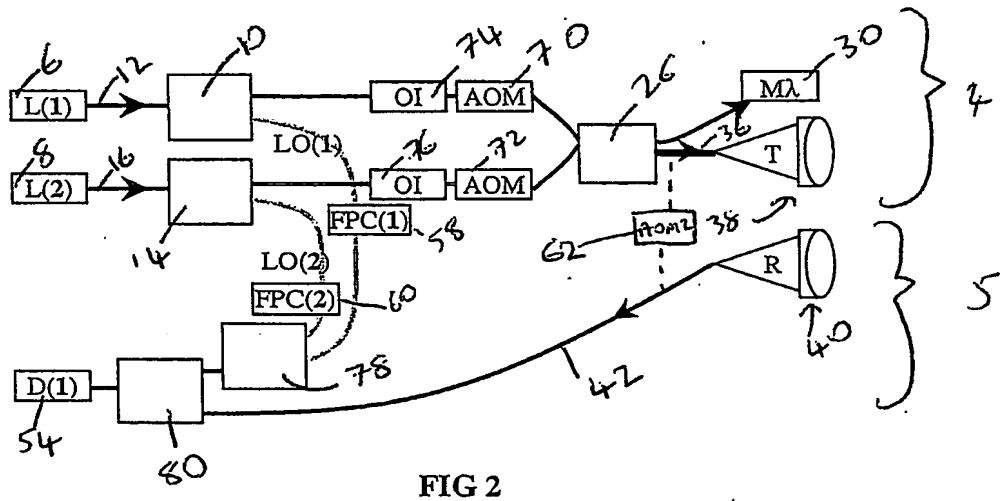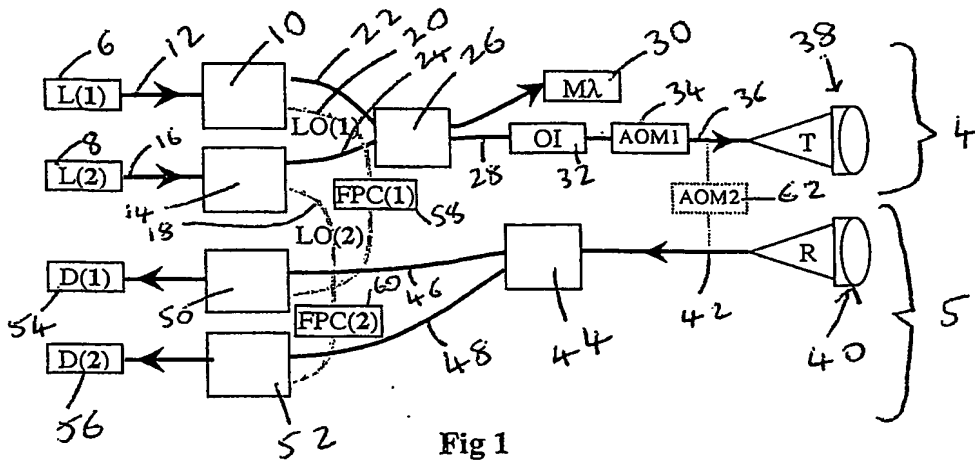

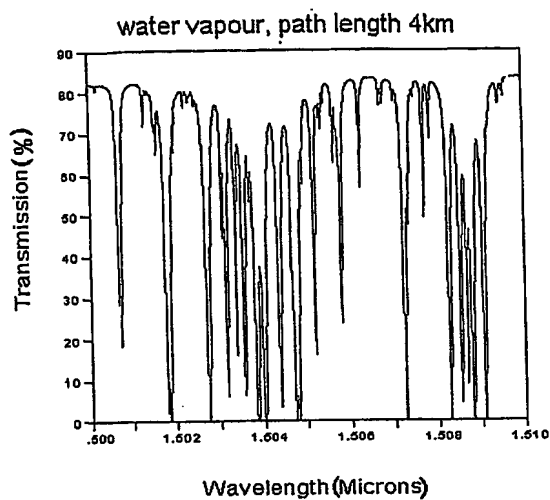


FIG 4

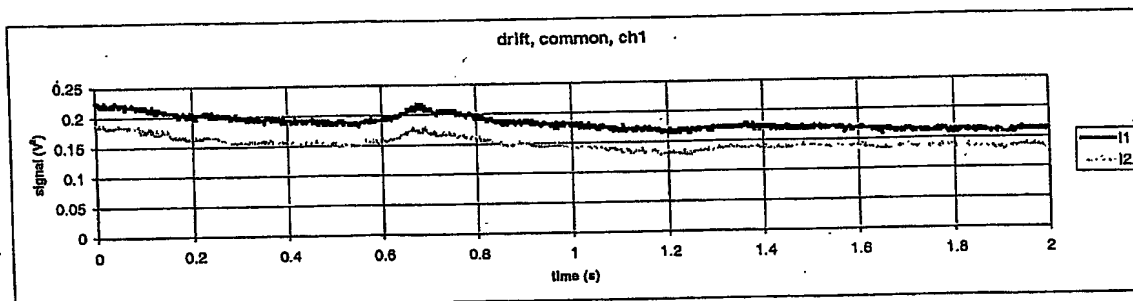


Fig 7(a)

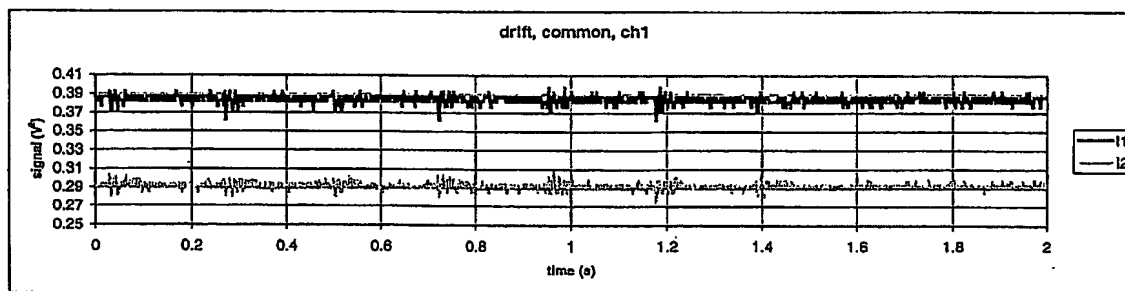


Fig 7(b)

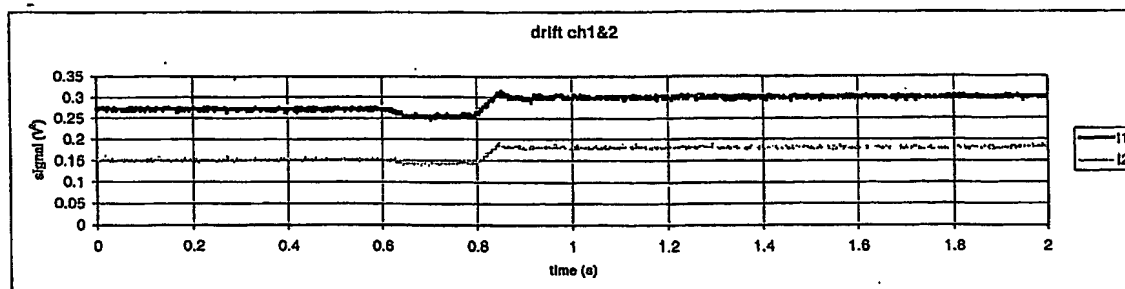


Fig 7(c)

FIG 7

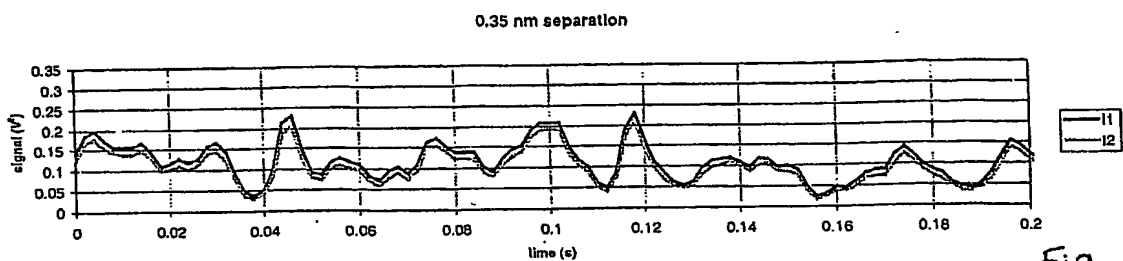


Fig 5a

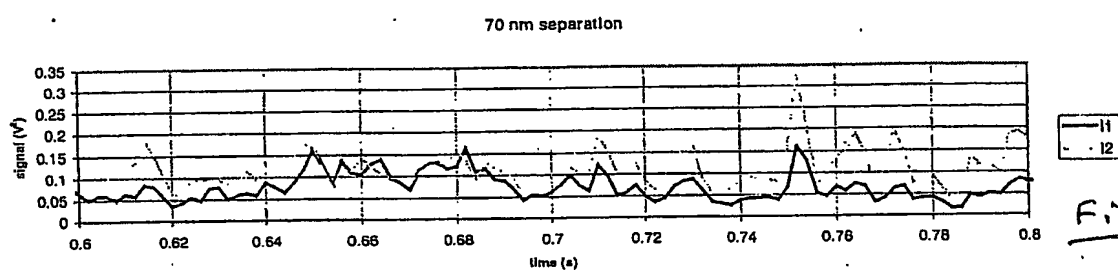


Fig 5b

FIG 5

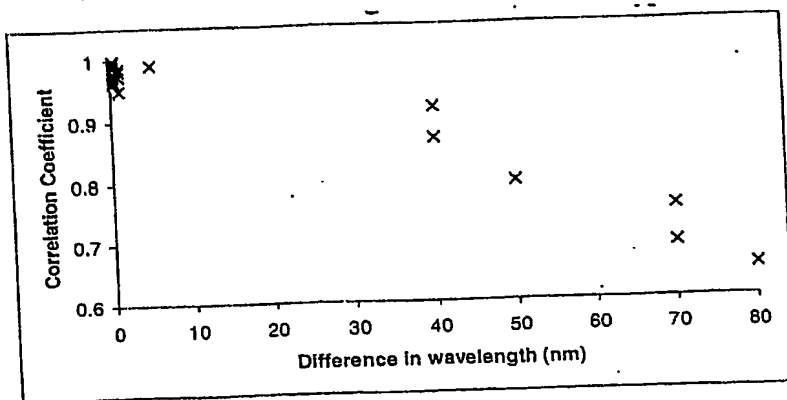


FIG. 6

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**